



## 1. PC Tool Start UP

### 1.1 Unzip the file Jimi-PCtools\_V1.0

 Jimi-PCtools\_V1.0.rar

### 1.2 Open Jimi-Pctools

 Jimi-PCtools

### 1.3 Set up the language as following step



### 1.4 Click 应用



## 1.5 Set up the language as following step

Input Your account and password



## 1.6 Set up the language as following step

Connect the Tracker with the specific cable then select the port as below,after that click **Connect**


## 1.7 Set up the language as following step

Device status information will show on the right side as below




# 1. Device Connecting Help

- (1) If you are not able to connect the device, please get help from **Device Connecting Help**, some time maybe the driver is not installed.

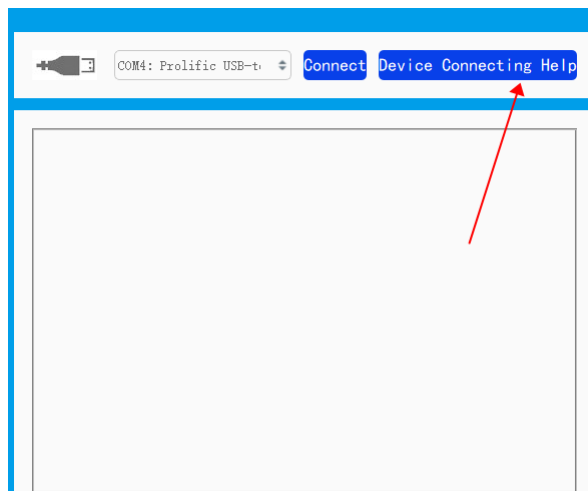

- (2) Select the Model on left side, then click **Install**. Please make sure the device connect cable is the specific cable of your model. You can connect with your sales representative to get the specific cable.

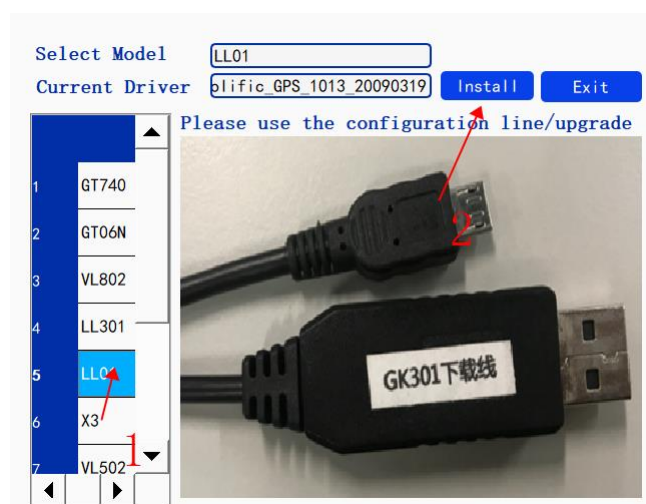

## 2. Parameter Configuration Setting up

(1) Click Config-LL01config, then you will have the parameter setting list as below

Jimi IoT PCtools V0.99

device info config debug configuration

LL01config

Save to Device Auto Start Custom Config Save Configuration


Item Quantity 14 Success 0 Failed 0 Upload Log

| Setup                   | Center number                       | Add       | 27605642044 | Number | Number |
|-------------------------|-------------------------------------|-----------|-------------|--------|--------|
| Setup time zone         | eastern time zone                   | 0         | 8           |        |        |
| Setup vibration alarm   | <input checked="" type="checkbox"/> | GPRS      |             |        |        |
| Setup install alarm     | <input checked="" type="checkbox"/> | GPRS      |             |        |        |
| Setup speeding alarm    | <input checked="" type="checkbox"/> | GPRS      | 20          | 110    |        |
| Setup low-battery alarm | <input checked="" type="checkbox"/> | GPRS      |             |        |        |
| Setup Stopmode          | <input checked="" type="checkbox"/> | 600       | 0           | 0      |        |
| Setup working mode      | Tracking mode                       | 10        | 180         |        |        |
| Setup GPS DATA          | <input checked="" type="checkbox"/> |           |             |        |        |
| Setup GSM Interval      | 2                                   |           |             |        |        |
| Setup SERVER            | IP                                  | 127.0.0.1 | 1433        |        |        |
| APN Name check          |                                     |           |             |        |        |
| Center number check     |                                     |           |             |        |        |
| GPS interval check      |                                     |           |             |        |        |

(2) Modify the parameter as you like, then click the **Save to Device** Button

### 3. Debugging Page

(1) You can send command according to the command list

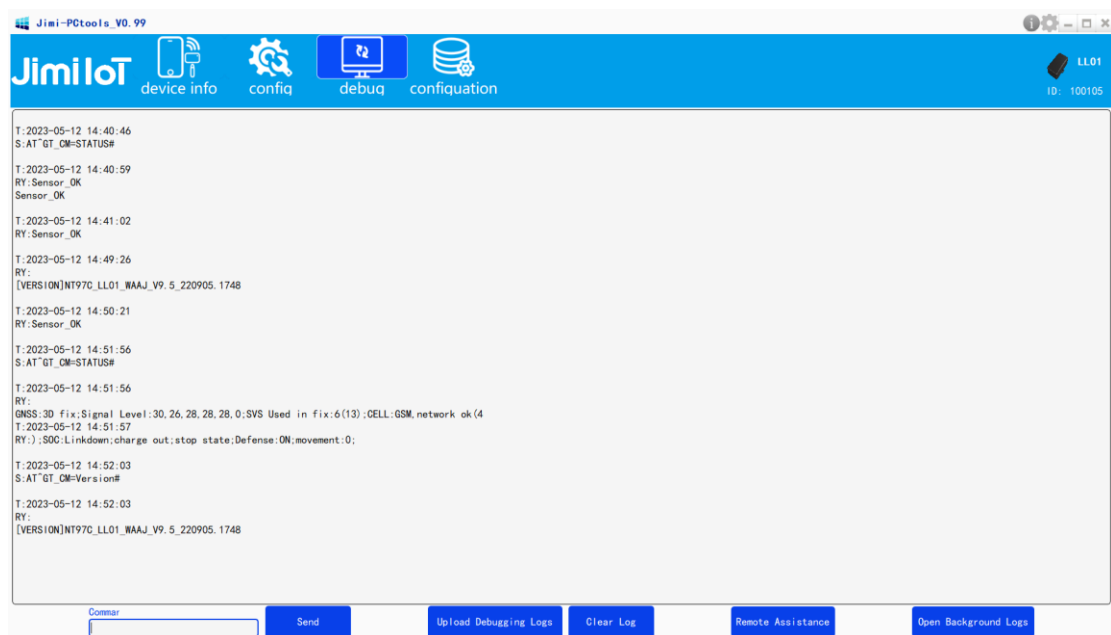

## 4. Configuration

- (1) This page is mostly for the Jimi Technical Support team, we also still optimizing, we will give you more information from version V1.0